



CENTSEA

HIGH PRESSURE PUMPS

2026

高压柱塞泵产品手册

PRODUCT CATALOGUE

ENGINEERED FOR PERFORMANCE

南京承希科技有限公司

www.centsea.com | 025-85551635

产品目录

CONTENTS / PRODUCT INDEX

FKE 系列	FKA 系列
FKE-F04 01	FKA-N（镀镍） 12
FKE-F05 02	FKAT-N（镀镍） 13
FKE-F06 03	FKA-N 14
FKEL-F07 04	
FKE-N 05	FK 系列
FKELR-N 06	FK-N（镀镍） 15
	FKT-N（锻打） 16
	FKG-N（不锈钢） 17
FKD 系列	
FKD-F01 / F10 07	
FKD-N 08	
FKD-F12 09	
FKC-N 10	
FKC-F10 11	

产品目录

CONTENTS / PRODUCT INDEX

防腐蚀系列		工业泵系列	
FKEG-N	18	WKX	24
FKEG-F05 / F11	19	WKXC	25
FKDG-N	20	WKXT	26
FKDG-F01 / F10	21	FKH	27
FKAG-N (304 / 316 / 2205)	22	FKHG	28
FKAG-N (304 / 316)	23	FKHC	29
		FKHT	30
		FKL	31
		FKLG	32
		FKLC	33
		FKLT	34

COMPACT TRIPLEX PLUNGER PUMP


FKE-F04 系列



性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKE0310(1803)	3.3	0.9	100	1450	1.0	0.75	1450	G1/2"	G3/8"	8.0
FKE0610(1805)	5.5	1.45	100	1450	1.5	1.1	1450	G1/2"	G3/8"	8.0
FKE0910(1808)	9.0	2.4	100	1450	2.0	1.5	1450	G1/2"	G3/8"	8.0
FKE1115(1810.5)	11	2.9	150	2200	4.0	3.0	1450	G1/2"	G3/8"	8.0

FKE-F04 外形尺寸图 / OVERALL DIMENSIONS (mm)

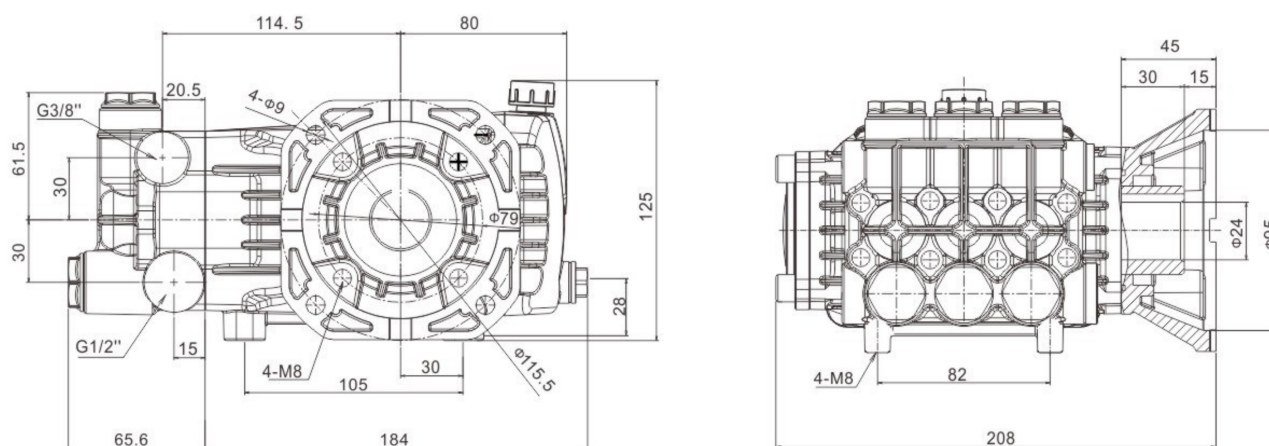

COMPACT TRIPLEX PLUNGER PUMP


FKE-F05 系列



性能参数 / PERFORMANCE DATA


型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKE1110(1810)	11.0	2.9	100	1450	3.0	2.2	1450	G1/2"	G3/8"	8.0
FKE1310(1812)	13.2	3.5	100	1450	3.5	2.6	1450	G1/2"	G3/8"	8.0
FKE1510(1814)	15.4	4.0	100	1450	4.0	3.0	1450	G1/2"	G3/8"	8.0
FKE2010(1817)	20.0	5.3	100	1450	5.3	4.0	1450	G1/2"	G3/8"	8.0

FKE-F05 外形尺寸图 / OVERALL DIMENSIONS (mm)

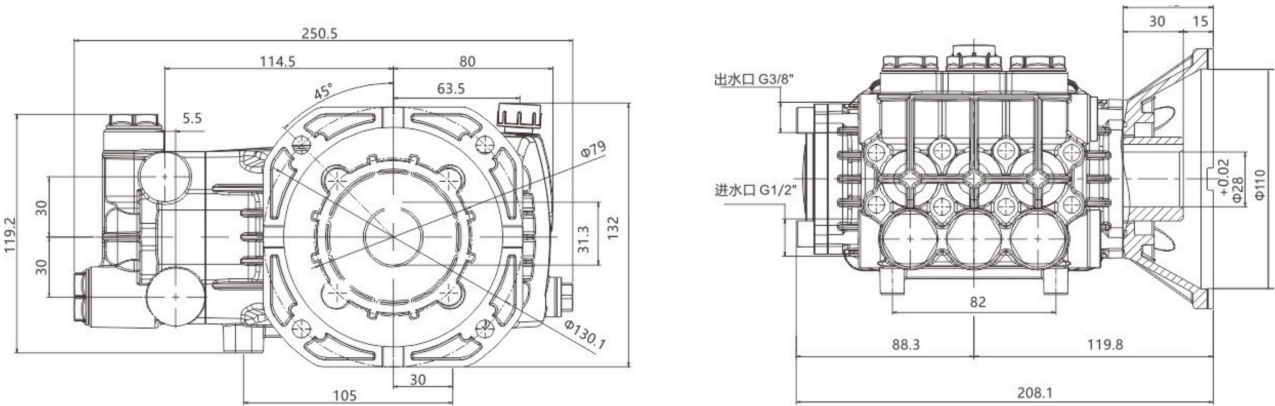

COMPACT TRIPLEX PLUNGER PUMP



FKE-F06 系列

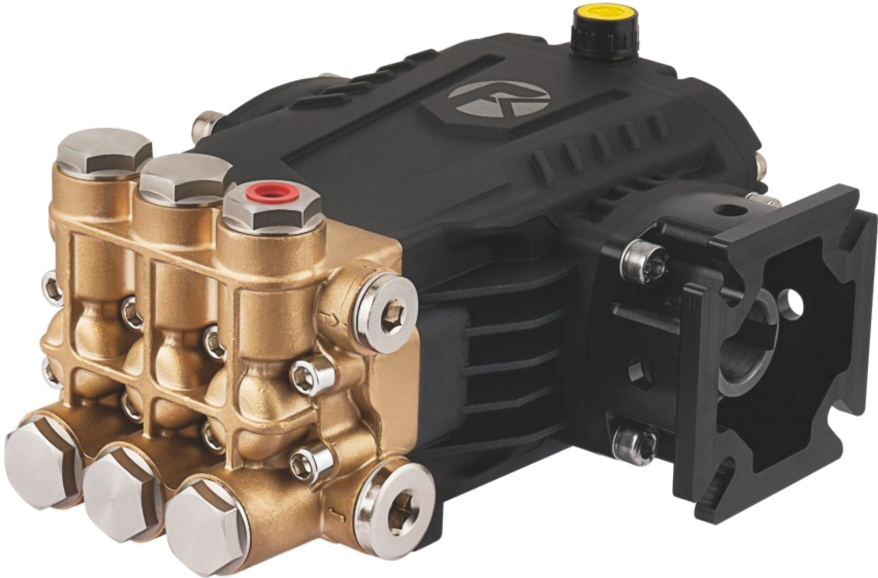

性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKE1319(1805)	13.0	3.5	190	2755	6.5	4.8	3440	G1/2"	G3/8"	8.3

FKE-F06 外形尺寸图 / OVERALL DIMENSIONS (mm)

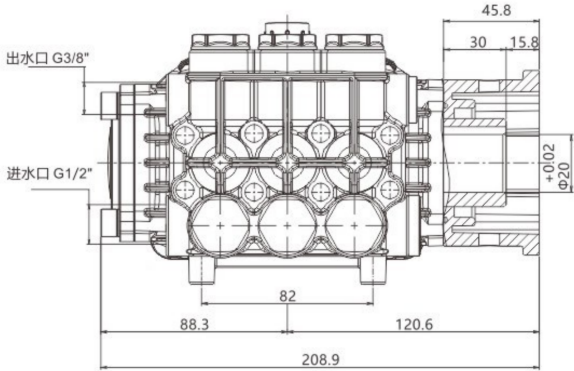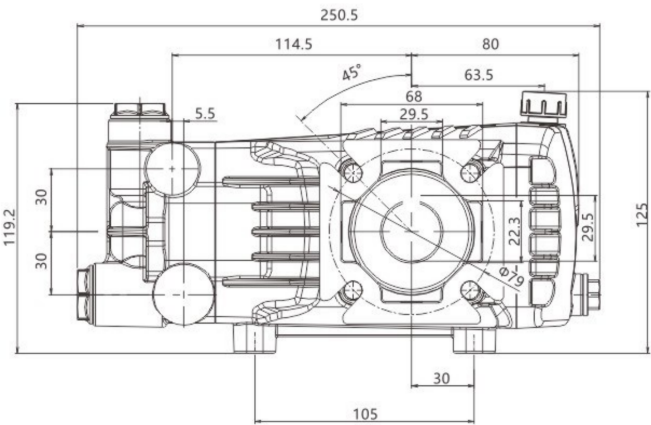

COMPACT TRIPLEX PLUNGER PUMP


FKEL-F07 系列



性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKEL1825(1807)	18.0	4.9	250	3600	13.0	9.8	3440	G1/2"	G3/8"	8.3
FKEL2420(1809)	24.0	6.4	200	2900	13.0	9.8	3440	G1/2"	G3/8"	8.3

FKEL-F07 外形尺寸图 / OVERALL DIMENSIONS (mm)

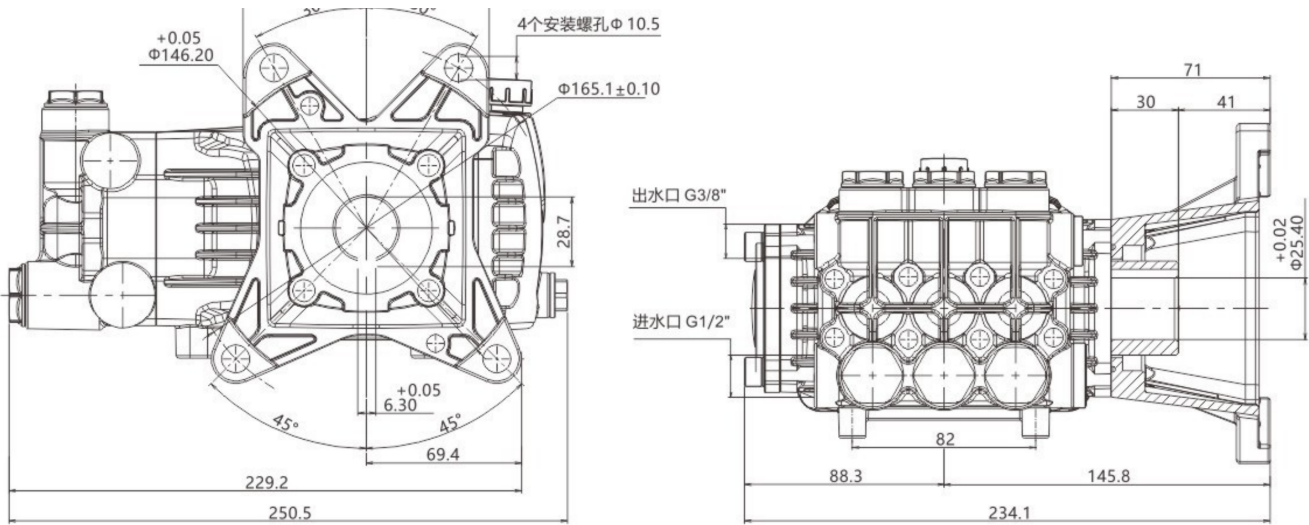

COMPACT TRIPLEX PLUNGER PUMP



FKE-N 系列



性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKE0810(1807)	8.0	2.1	100	1450	2.2	1.6	1450	G1/2"	G3/8"	7.3
FKE1510(1814)	15.4	4.0	100	1450	4.0	3.0	1450	G1/2"	G3/8"	7.3
FKE1525(1814)	15.4	4.0	250	3600	10	7.5	1450	G1/2"	G3/8"	7.3

FKE-N 外形尺寸图 / OVERALL DIMENSIONS (mm)

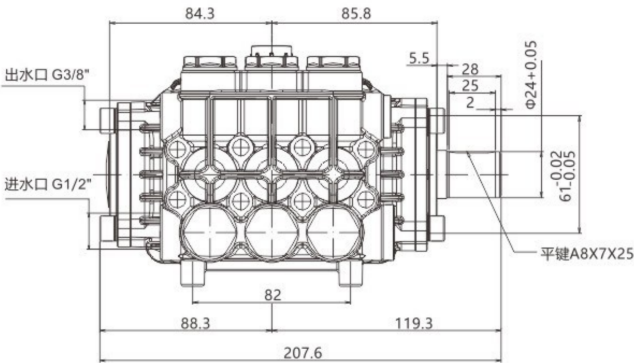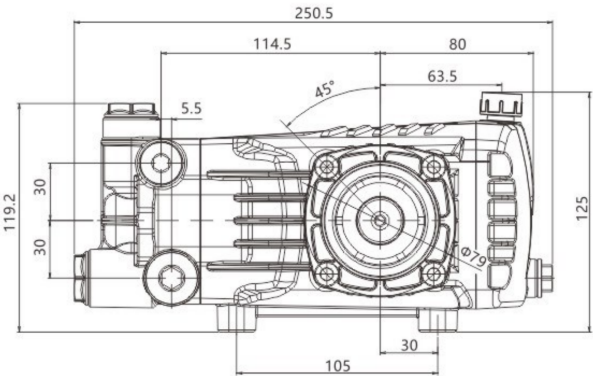

COMPACT TRIPLEX PLUNGER PUMP


FKELR-N 系列



性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKELR1125(1810)	11.5	3.0	250	3600	7.4	5.5	1450	G1/2"	G3/8"	7.5
FKELR1325(1812)	13.2	3.5	250	3600	8.7	6.5	1450	G1/2"	G3/8"	7.5
FKELR1525(1814)	15.4	4.0	250	3600	10.0	7.5	1450	G1/2"	G3/8"	7.5
FKELR2020(1817)	20.0	5.3	200	2900	10.6	8.0	1450	G1/2"	G3/8"	7.5

FKELR-N 外形尺寸图 / OVERALL DIMENSIONS (mm)

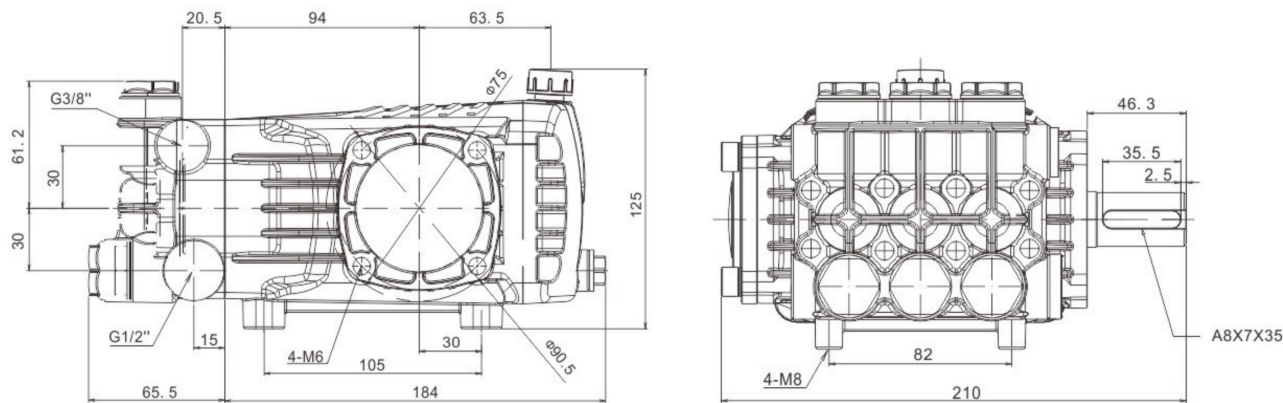

COMPACT TRIPLEX PLUNGER PUMP



FKD-F01 / F10 系列




性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKD1330(1812)	13.2	3.5	300	4350	10.4	7.8	1450	G1/2"	G3/8"	12.2
FKD1530(1814)	15.4	4.0	300	4350	12.0	9.0	1450	G1/2"	G3/8"	12.2
FKD2030(1818)	20.0	5.3	300	4350	16.0	12.0	1450	G1/2"	G3/8"	12.2
FKD2610(2512)	26.0	6.9	100	1450	7.4	5.5	1450	G3/4"	G1/2"	11.5
FKD3010(2514)	30.0	8.0	100	1450	8.0	6.0	1450	G3/4"	G1/2"	11.5
FKD4010(2518)	40.0	10.5	100	1450	10.0	7.5	1450	G3/4"	G1/2"	11.5

FKD-F01 / F10 外形尺寸图 / OVERALL DIMENSIONS (mm)

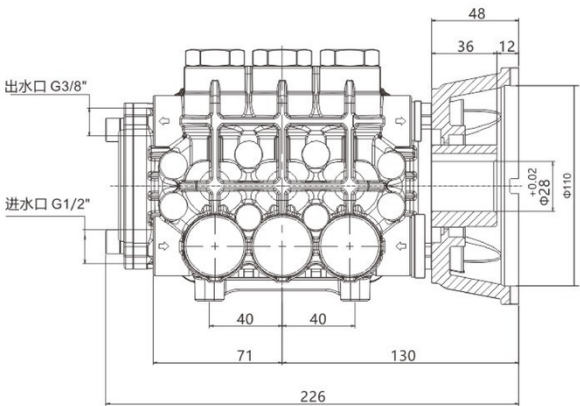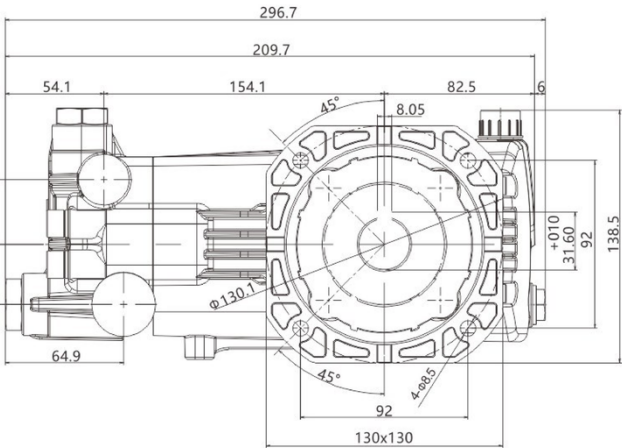

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	ps i psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKD1335(1812)	13.2	3.5	350	5075	12.0	9.0	1450	G1/2"	G3/8"	11.2
FKD1535(1814)	15.4	4.0	350	5075	14.0	10.5	1450	G1/2"	G3/8"	11.2
FKD2035(1818)	20.0	5.3	350	5075	18.6	14.0	1450	G1/2"	G3/8"	11.2
FKD2615(2512)	26.0	6.8	150	2200	10.0	7.5	1450	G3/4"	G1/2"	11.2
FKD3015(2514)	30.0	7.9	150	2200	12.0	9.0	1450	G3/4"	G1/2"	11.2
FKD4015(2518)	40.0	10.5	150	2200	16.0	12.0	1450	G3/4"	G1/2"	11.2

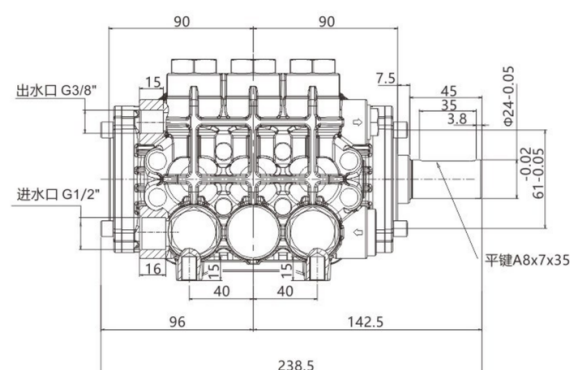

COMPACT TRIPLEX PLUNGER PUMP



FKD-F12 系列



性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKD3515(2209)	35.0	9.2	150	2200	14.0	10.5	3440	G3/4"	G1/2"	12.0

FKD-F12 外形尺寸图 / OVERALL DIMENSIONS (mm)

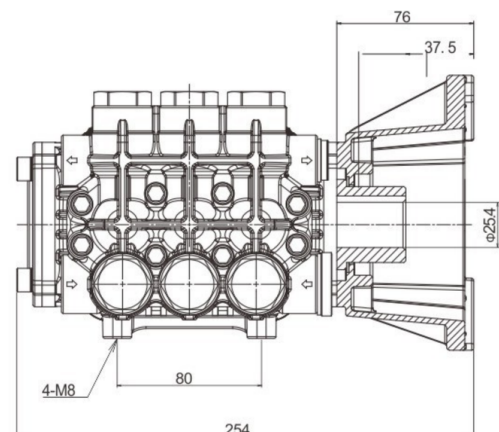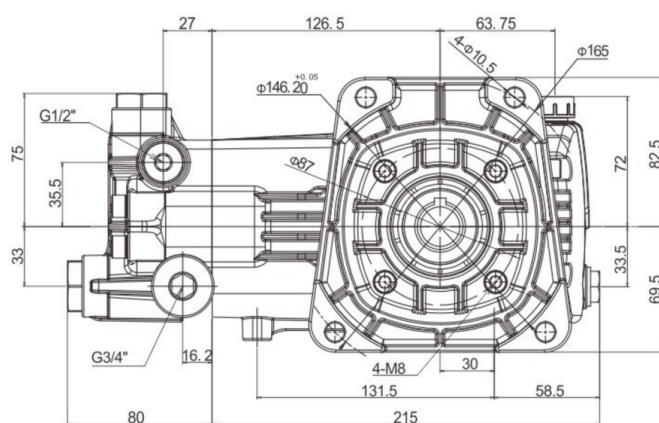

COMPACT TRIPLEX PLUNGER PUMP


FKC-N 系列



性能参数 / PERFORMANCE DATA


型号 Model	流量 Flow L/min	gpm	压力 bar	psi	功率 hp	kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKC5015(2818)	50.0	13.0	150	2200	20.0	15.0	1450	G3/4"	G1/2"	12.3

FKC-N 外形尺寸图 / OVERALL DIMENSIONS (mm)

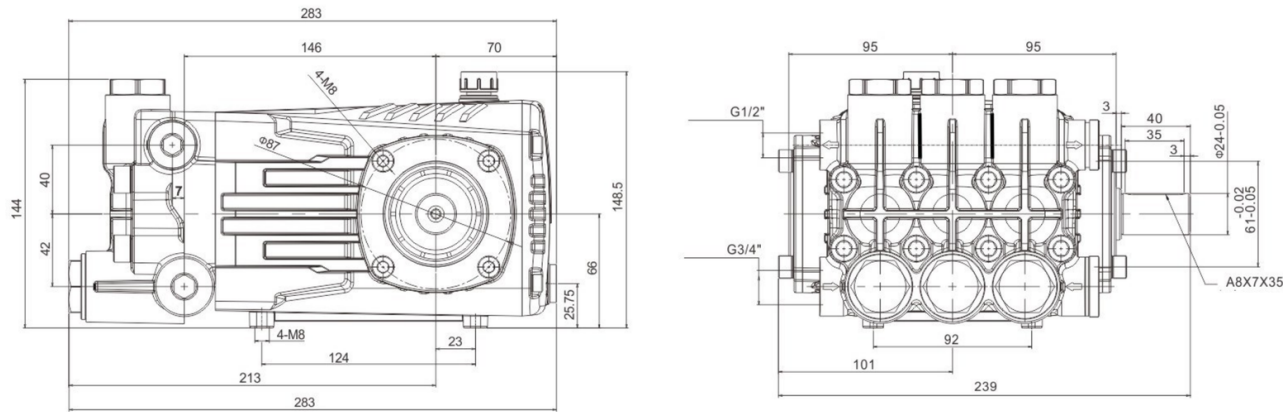

COMPACT TRIPLEX PLUNGER PUMP



FKC-F10 系列

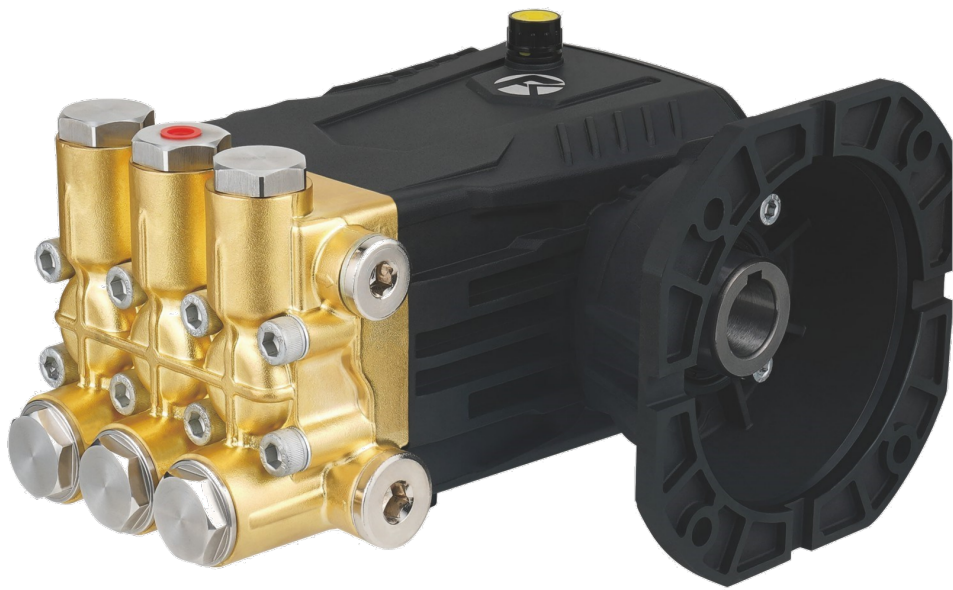

性能参数 / PERFORMANCE DATA


型号 Model	流量 Flow L/min	gpm	压力 bar	psi	功率 hp	kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKC5010(2818)	50.0	13.0	100	1450	13.5	10.0	1450	G3/4"	G1/2"	13.2

FKC-F10 外形尺寸图 / OVERALL DIMENSIONS (mm)

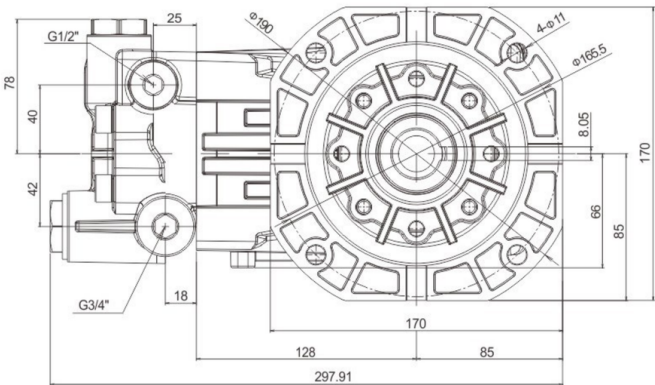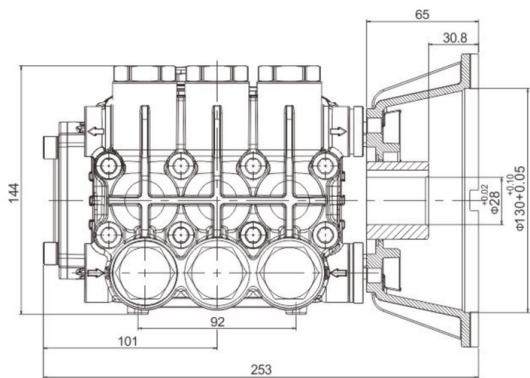

COMPACT TRIPLEX PLUNGER PUMP



FKA-N（镀镍） 系列

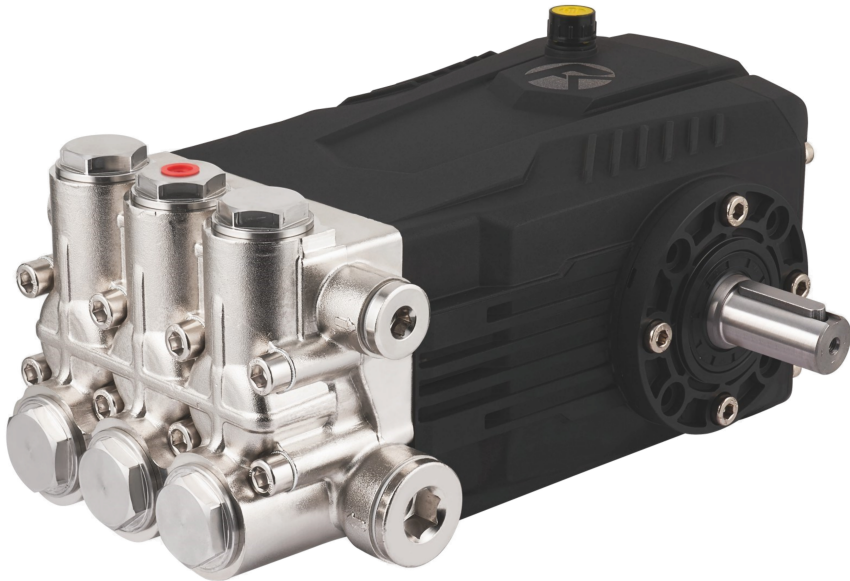

性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKA4020(2815)	40.0	10.6	200	2900	21.5	16.0	1450	G1"	G1/2"	19.8
FKA5020(2819)	50.0	13.2	200	2900	36.5	20.0	1450	G1"	G1/2"	19.8
FKA5215(3215)	52.0	13.7	150	2175	21.0	15.6	1450	G1"	G1/2"	19.8
FKA5620(2821)	56.0	14.8	200	2900	30.0	22.0	1450	G1"	G1/2"	19.8
FKA6615(3219)	66.0	17.5	150	2500	26.5	20.0	1450	G1"	G1/2"	19.8
FKA7415(3221)	74.0	19.5	150	2200	30.0	22.0	1450	G1"	G1/2"	20.7

FKA-N（镀镍） 外形尺寸图 / OVERALL DIMENSIONS (mm)

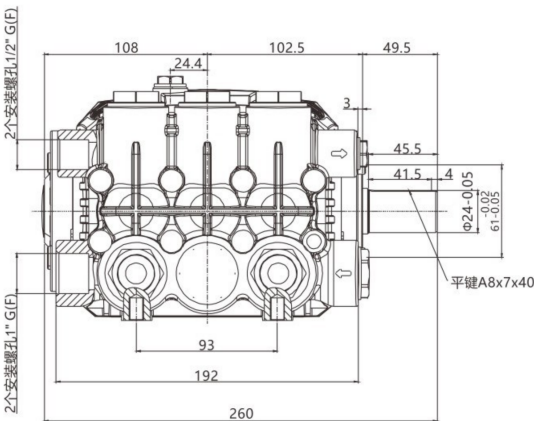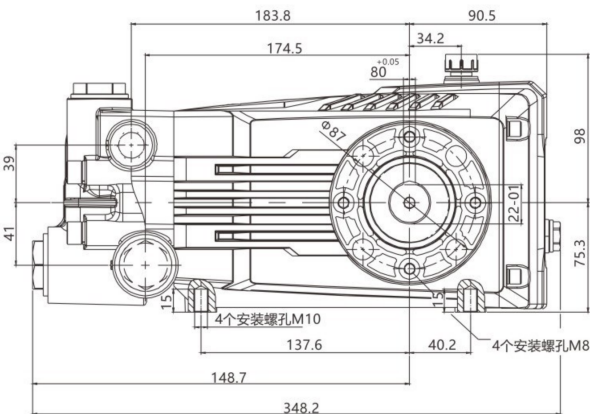

COMPACT TRIPLEX PLUNGER PUMP



FKAT-N（镀镍） 系列



性能参数 / PERFORMANCE DATA


型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKAT2330(2511)	23.0	6.0	300	4350	18.4	13.8	1450	G1"	G1/2"	20.5
FKAT3230(2515)	30.0	8.0	300	4350	25.6	19.2	1450	G1"	G1/2"	20.5
FKAT3525(2516)	35.0	9.2	250	3625	23.3	17.5	1450	G1"	G1/2"	21.3
FKAT4025(2519)	40.0	10.6	250	3625	36.5	20.0	1450	G1"	G1/2"	21.3
FKAT4525(2521)	45.0	11.9	250	3625	30.0	22.5	1450	G1"	G1/2"	21.3

FKAT-N（镀镍） 外形尺寸图 / OVERALL DIMENSIONS (mm)

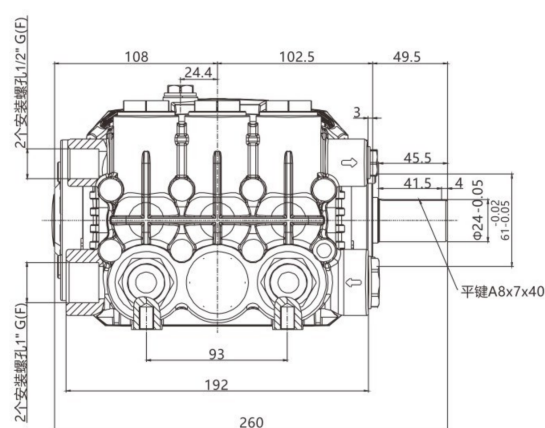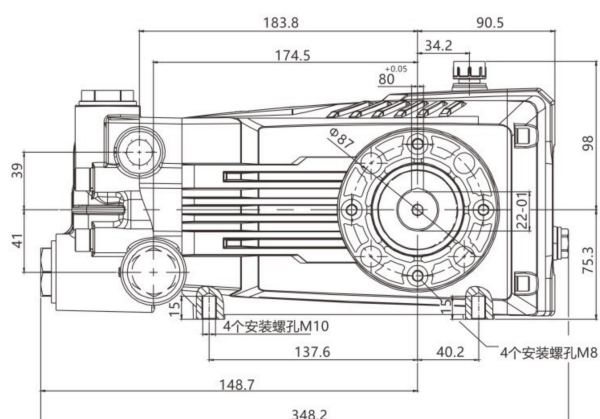

COMPACT TRIPLEX PLUNGER PUMP



FKA-N 系列

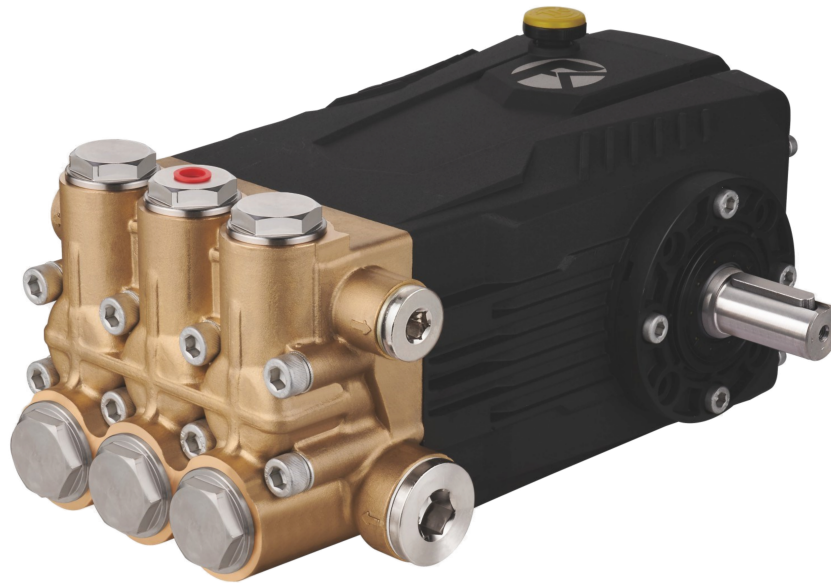

性能参数 / PERFORMANCE DATA


型号 Model	流量 Flow L/min	gpm	压力 bar	psi	功率 hp	kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKA4020(2815)	40.0	10.6	200	2900	21.5	16.0	1450	G1"	G1/2"	19.8
FKA5020(2819)	50.0	13.2	200	2900	36.5	20.0	1450	G1"	G1/2"	19.8
FKA5215(3215)	52.0	13.7	150	2175	21.0	15.6	1450	G1"	G1/2"	19.8
FKA5620(2821)	56.0	14.8	200	2900	30.0	22.0	1450	G1"	G1/2"	19.8
FKA6615(3219)	66.0	17.5	150	2500	26.5	20.0	1450	G1"	G1/2"	19.8
FKA7415(3221)	74.0	19.5	150	2200	30.0	22.0	1450	G1"	G1/2"	20.7

FKA-N 外形尺寸图 / OVERALL DIMENSIONS (mm)

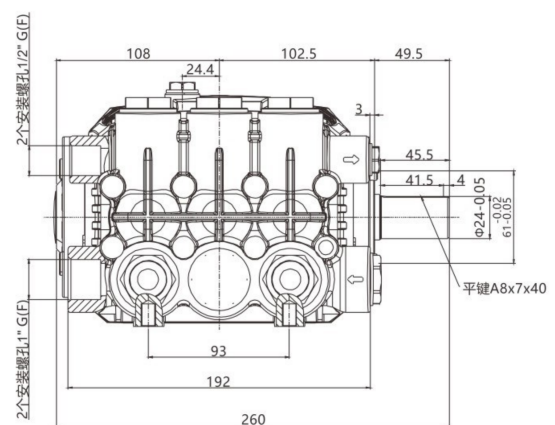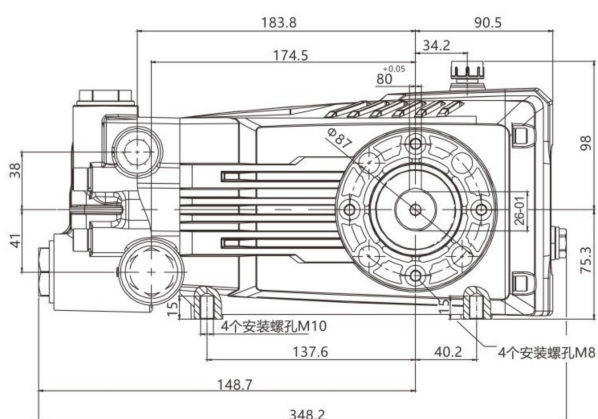

COMPACT TRIPLEX PLUNGER PUMP


FK-N（镀镍） 系列

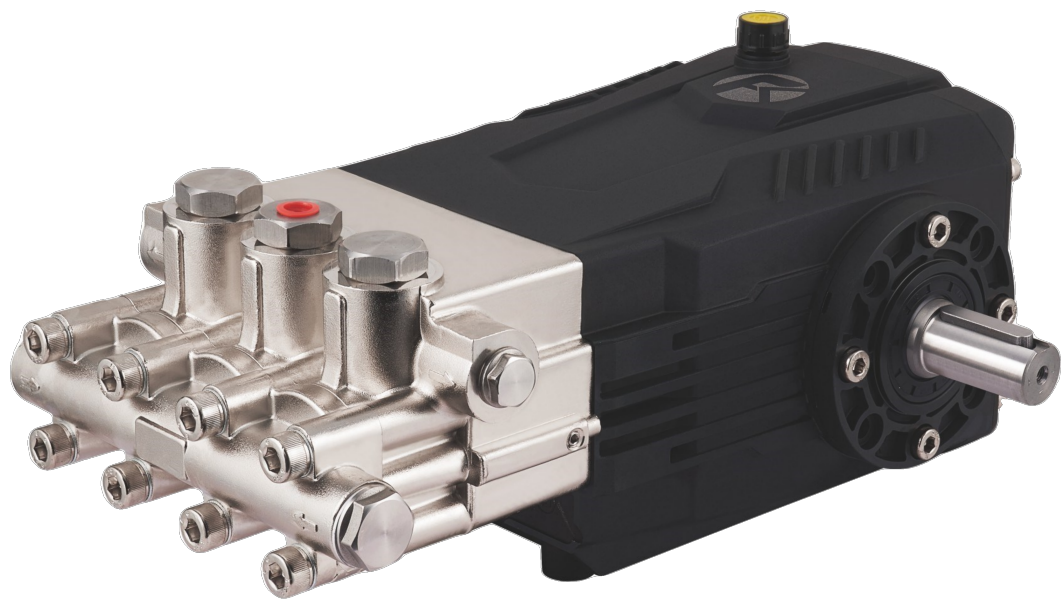

性能参数 / PERFORMANCE DATA


型号 Model	流量 L/min	Flow gpm	压力 bar	Pressure psi	功率 hp	Power kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FK1250(1811)	12.0	3.2	500	7250	16.0	12.0	1450	G1/2"	G3/8"	22.4
FK1650(1815)	16.5	4.4	500	7250	21.5	16.0	1450	G1/2"	G3/8"	22.4
FK1850(1816.5)	18.0	4.8	500	7250	24.0	18.0	1450	G1/2"	G3/8"	22.4
FK2335(1821)	23.0	6.0	350	5075	21.6	16.1	1450	G1/2"	G3/8"	22.4
FK2250(1821)	22.0	5.8	500	7250	29.5	22.0	1450	G1/2"	G3/8"	22.4
FK3050(2021)	30.0	8.0	500	7250	40.0	30.0	1450	G1/2"	G3/8"	23.7

FK-N（镀镍） 外形尺寸图 / OVERALL DIMENSIONS (mm)

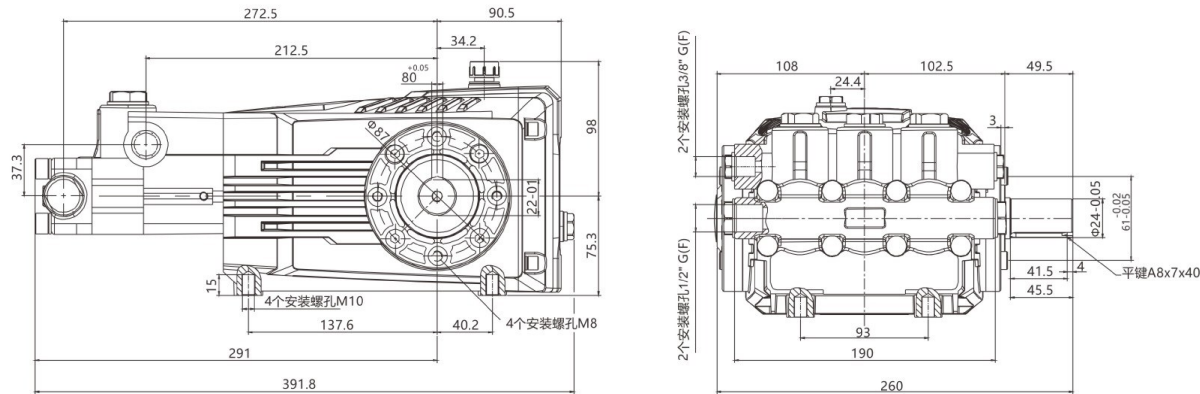

COMPACT TRIPLEX PLUNGER PUMP


FKT-N（锻打） 系列

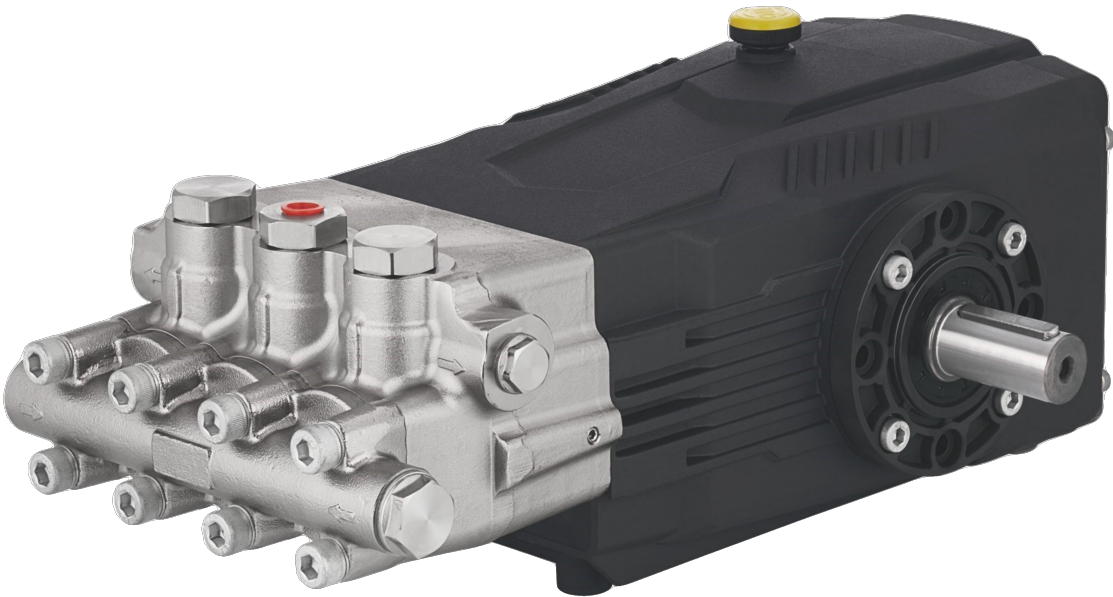

性能参数 / PERFORMANCE DATA


型号 Model	流量 L/min	Flow gpm	压力 bar	Pressure psi	功率 hp	Power kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKT2250(1821)	22.0	5.8	500	7250	29.5	22.0	1450	G1/2"	G3/8"	23.0
FKT2260(1821)	22.0	5.8	600	8700	35.4	26.4	1450	G1/2"	G3/8"	23.0
FKT2170(1721)	21.0	5.7	700	10150	40.0	30.0	1450	G1/2"	G3/8"	23.0
FKT1880(1621)	18.0	4.8	800	11600	38.4	28.8	1450	G1/2"	G3/8"	23.0
FKT3050(2021)	30.0	8.0	500	7250	40.0	30.0	1450	G1/2"	G3/8"	23.0

FKT-N（锻打） 外形尺寸图 / OVERALL DIMENSIONS (mm)

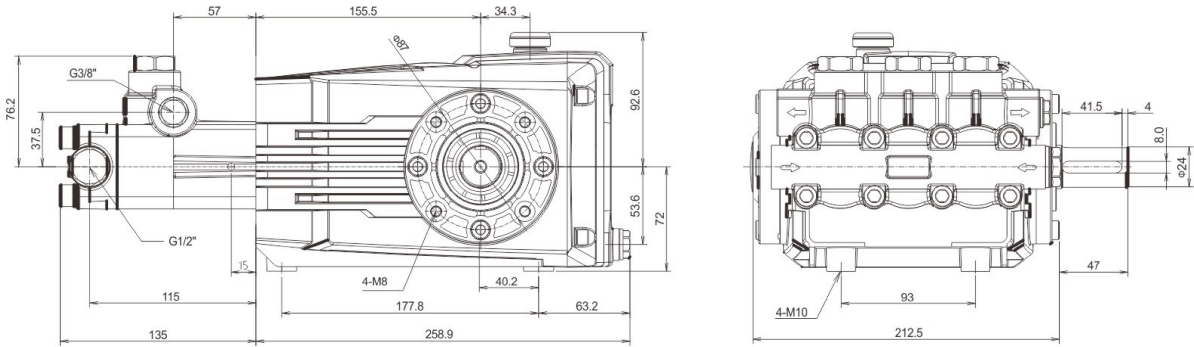

COMPACT TRIPLEX PLUNGER PUMP


FKG-N（不锈钢）系列

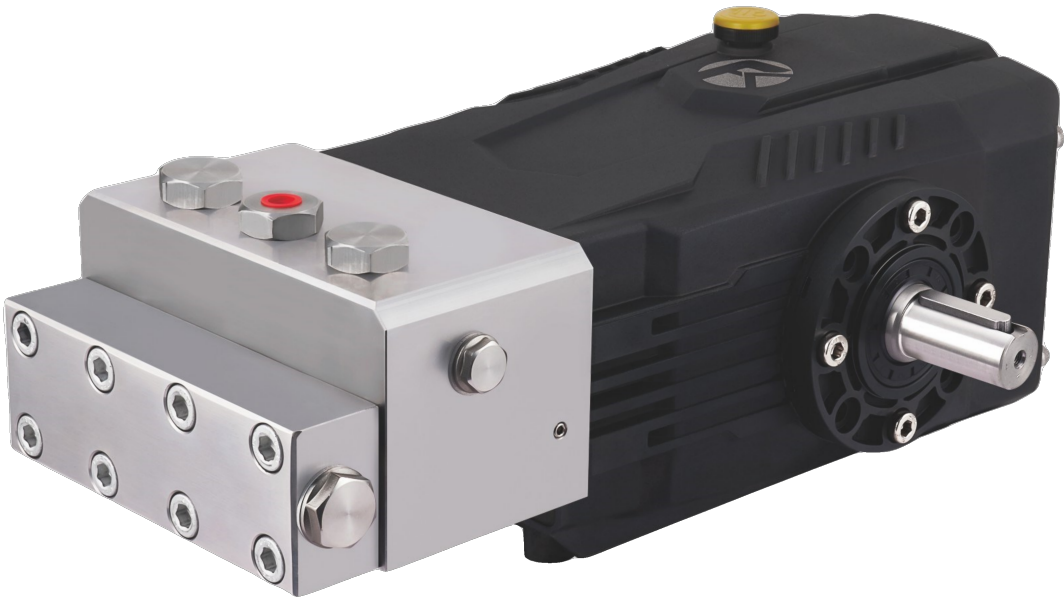

性能参数 / PERFORMANCE DATA

型号 Model	流量 L/min	Flow gpm	压力 bar	Pressure psi	功率 hp	Power kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKG2250(1821)	22.0	5.8	500	7250	29.5	22.0	1450	G1/2"	G3/8"	26.0
FKG2260(1821)	22.0	5.8	600	8700	35.4	26.4	1450	G1/2"	G3/8"	26.0
FKG3050(2021)	30.0	8.0	500	7250	40.0	30.0	1450	G1/2"	G3/8"	26.0
FKG2170(1721)	21.0	5.7	700	10150	38.0	28.0	1200	G1/2"	G3/8"	26.0
FKG1880(1621)	18.0	4.8	800	11600	38.4	28.8	1450	G1/2"	G3/8"	26.0

FKG-N（不锈钢）外形尺寸图 / OVERALL DIMENSIONS (mm)

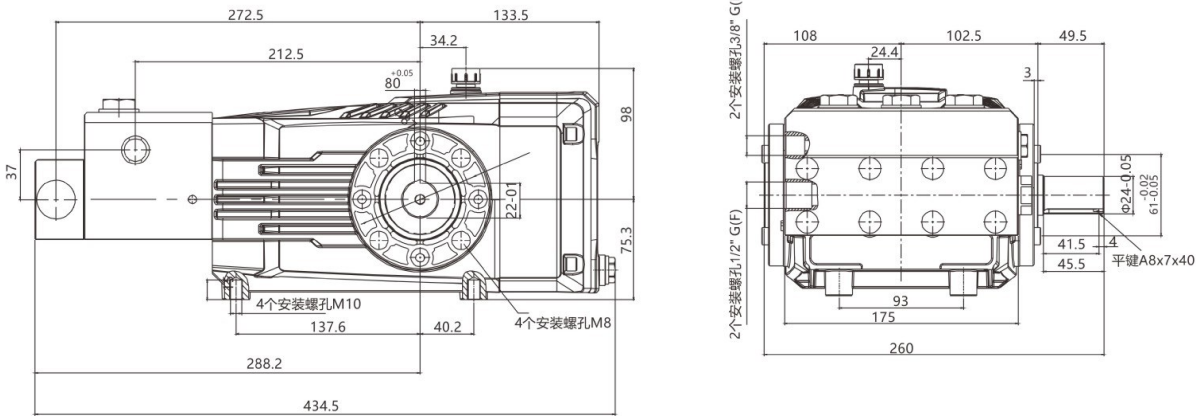

STAINLESS STEEL PUMP SERIES



FKEG-N 系列



性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKEG0810(1808)	8.0	2.1	100	1450	2.2	1.6	1450	G1/2"	G3/8"	8.7
FKEG1510(1814)	15.4	4.0	100	1450	4.0	3.0	1450	G1/2"	G3/8"	8.7
FKEG1525(1814)	15.4	4.0	250	3600	10.0	7.5	1450	G1/2"	G3/8"	8.7
FKEG2020(1817)	20.0	5.3	200	2900	10.6	8.0	1450	G1/2"	G3/8"	8.7

FKEG-N 外形尺寸图 / OVERALL DIMENSIONS (mm)

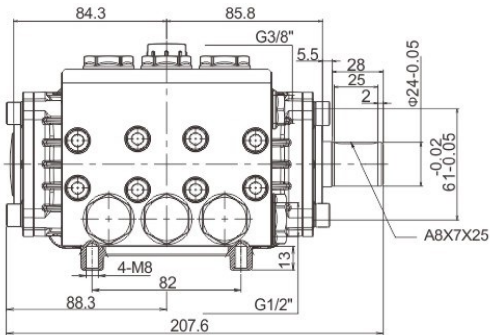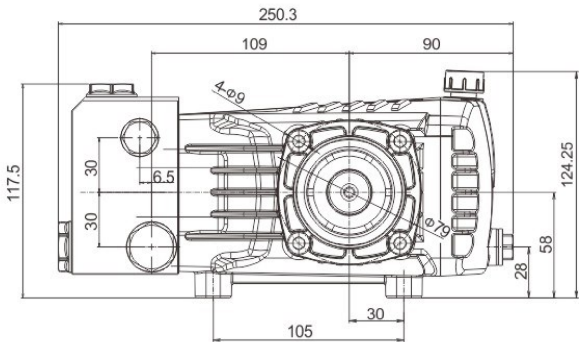



型号 Model	流量 Flow L/min	gpm gpm	压力 bar	ps i psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKEG1110(1810)	11.0	2.9	100	1450	3.0	2.2	1450	G1/2"	G3/8"	9.0
FKEG1315(1812)	13.2	3.5	150	2200	5.5	4.0	1450	G1/2"	G3/8"	9.0
FKEG1525(1814)	15.4	4.0	250	3600	10.0	7.5	1450	G1/2"	G3/8"	9.0
FKEG2020(1817)	20.0	5.3	200	2900	10.6	8.0	1450	G1/2"	G3/8"	9.0

The technical drawing shows two views of the GPH 6000 pump:

- Front View (Left):** Shows the main body with a total width of 250.3 mm and a height of 124.5 mm. The central circular port has a diameter of $\phi 130.1$. There are four mounting holes around the center, each with a diameter of $\phi 9$. The distance between the centers of these holes is 8.05 mm. The overall length of the unit is 131.25 mm.
- Side View (Right):** Shows the profile of the pump. The total length is 208.1 mm. The base has four mounting points labeled "4-M8". The top connection is labeled "G3/8\"". The bottom connection is labeled "G1/2\"". The distance from the left edge to the first M8 hole is 88.3 mm, and the distance between the first and second M8 holes is 82 mm. The right side features a flange with a thickness of 15 mm and a bore diameter of $\phi 72$.

STAINLESS STEEL PUMP SERIES



FKDG-N 系列



性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKDG2610(2512)	26.0	6.8	100	1450	6.6	5.0	1450	G3/4"	G1/2"	13.8
FKDG3015(2514)	30.0	7.9	150	2200	8.0	6.0	1450	G3/4"	G1/2"	13.8
FKDG4015(2518)	40.0	10.5	150	2200	10.0	7.5	1450	G3/4"	G1/2"	13.8
FKDG1535(1814)	15.0	4.0	350	5075	14.0	10.5	1450	G1/2"	G3/8"	15.0
FKDG2035(1818)	20.0	5.3	350	5075	20.0	15.0	1450	G1/2"	G3/8"	15.0

FKDG-N 外形尺寸图 / OVERALL DIMENSIONS (mm)

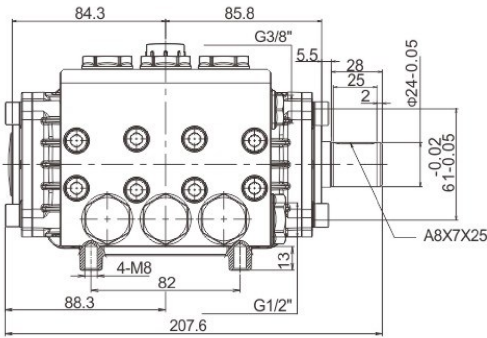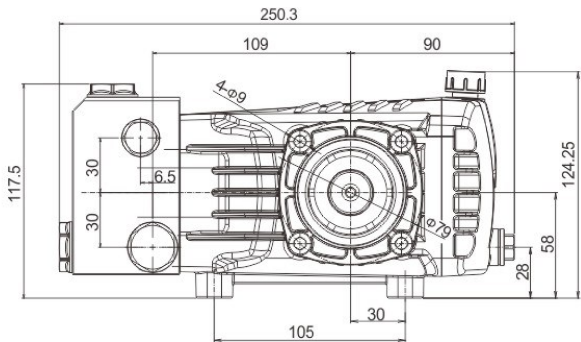

STAINLESS STEEL PUMP SERIES


FKDG-F01 / F10 系列



性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKDG2610(2512)	26.0	6.8	100	1450	6.6	5.0	1450	G3/4"	G1/2"	14.5
FKDG3015(2514)	30.0	7.9	150	2200	8.0	6.0	1450	G3/4"	G1/2"	14.5
FKDG4015(2518)	40.0	10.5	150	2200	10.0	7.5	1450	G3/4"	G1/2"	14.5
FKDG1530(1814)	15.0	4.0	300	4350	12.0	9.0	1450	G1/2"	G3/8"	16.0
FKDG2030(1818)	20.0	5.3	300	4350	16.0	12.0	1450	G1/2"	G3/8"	16.0

FKDG-F01 / F10 外形尺寸图 / OVERALL DIMENSIONS (mm)

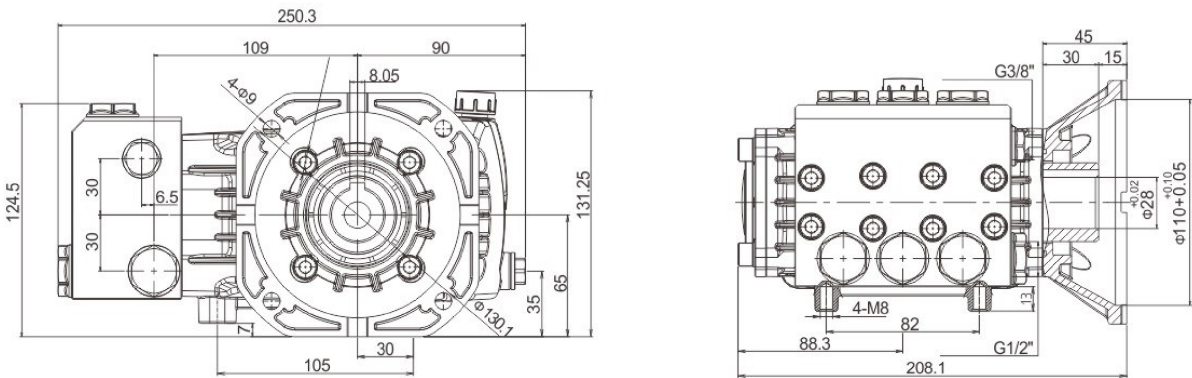

STAINLESS STEEL PUMP SERIES


FKAG-N（304 / 316 / 2205） 系列



性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKAG3020(2811)	30.0	7.9	200	2900	16.0	12.0	1450	G1"	G1/2"	24.6
FKAG4020(2815)	40.0	10.6	200	2900	21.5	16.0	1450	G1"	G1/2"	24.6
FKAG5020(2819)	50.0	13.2	200	2900	26.5	20.0	1450	G1"	G1/2"	24.6
FKAG5620(2821)	56.0	14.8	220	2900	30.0	22.0	1450	G1"	G1/2"	24.6

FKAG-N（304 / 316 / 2205） 外形尺寸图 / OVERALL DIMENSIONS (mm)

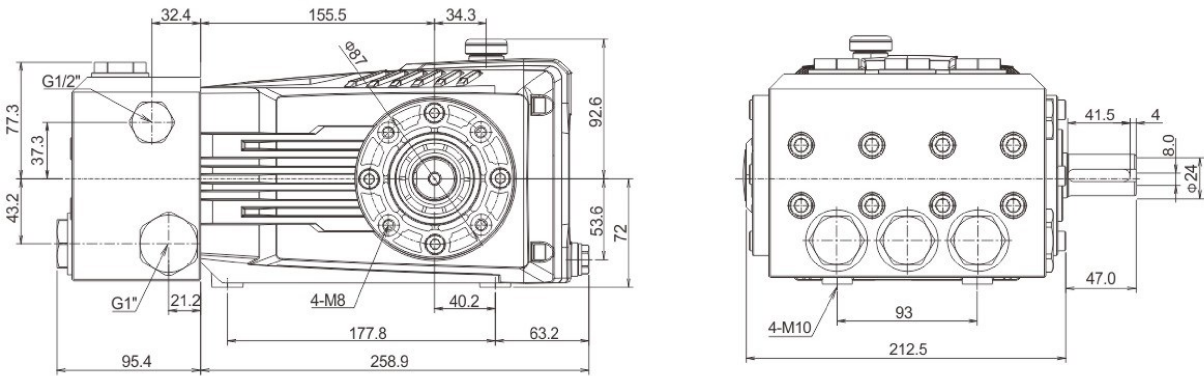

STAINLESS STEEL PUMP SERIES


FKAG-N（304 / 316） 系列




性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKAG5210(3215)	52.0	13.8	100	1450	14.0	11.0	1450	G1"	G1/2"	25.2
FKAG6210(3218)	62.0	16.4	100	1450	16.5	12.5	1450	G1"	G1/2"	25.2
FKAG6610(3219)	66.0	17.5	100	1450	17.6	13.2	1450	G1"	G1/2"	25.2
FKAG7410(3221)	74.0	19.5	100	1450	20.0	15.0	1450	G1"	G1/2"	25.2

FKAG-N（304 / 316） 外形尺寸图 / OVERALL DIMENSIONS (mm)

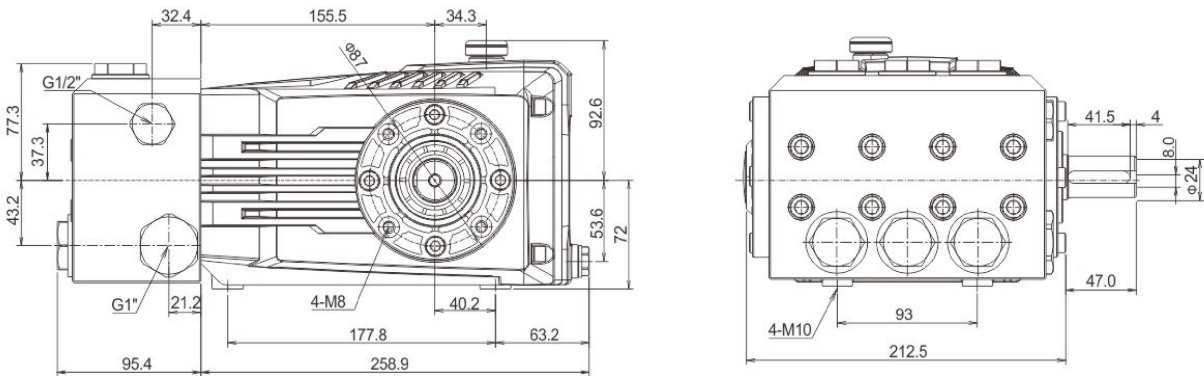


WKX 系列

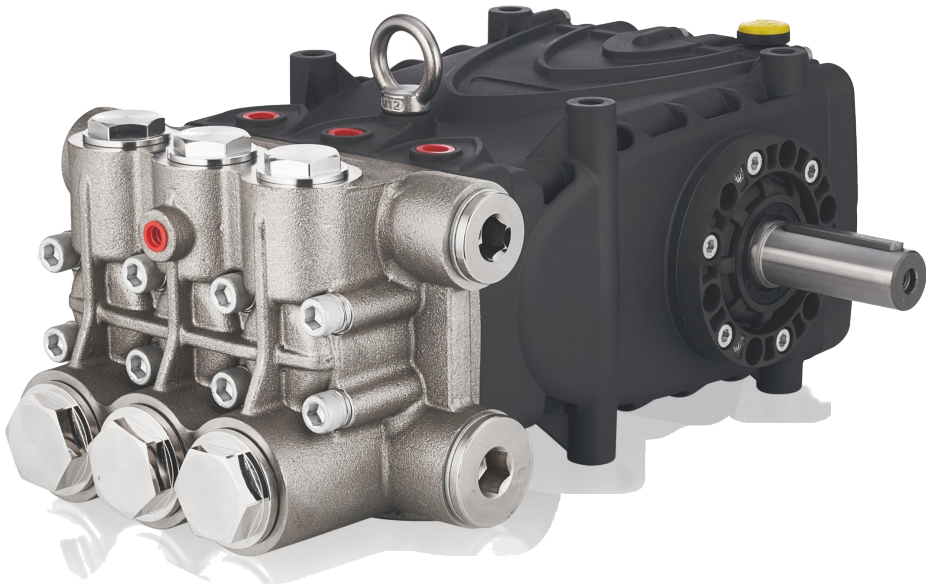

性能参数 / PERFORMANCE DATA


型号 Model	流量 Flow L/min	gpm	压力 bar	psi	功率 hp	kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
WKX30	85.0	22.5	180	2610	40.0	30.0	1450	G1 1/4"	G1"	36.0
WKX32	96.0	25.4	150	2200	40.0	30.0	1450	G1 1/4"	G1"	36.0
WKX36	121.0	32.0	130	1890	40.0	30.0	1450	G1 1/4"	G1"	36.0
WKX40	150.0	39.6	100	1450	40.0	30.0	1450	G1 1/4"	G1"	36.0
WKX45	131.0	34.6	80	1160	28.0	21.0	1000	G1 1/4"	G1"	36.0
WKX45	118.0	31.1	80	1160	25.0	19.0	900	G1 1/4"	G1"	36.0
WKX45	105.0	27.7	80	1160	23.0	17.0	800	G1 1/4"	G1"	36.0

WKX 外形尺寸图 / OVERALL DIMENSIONS (mm)

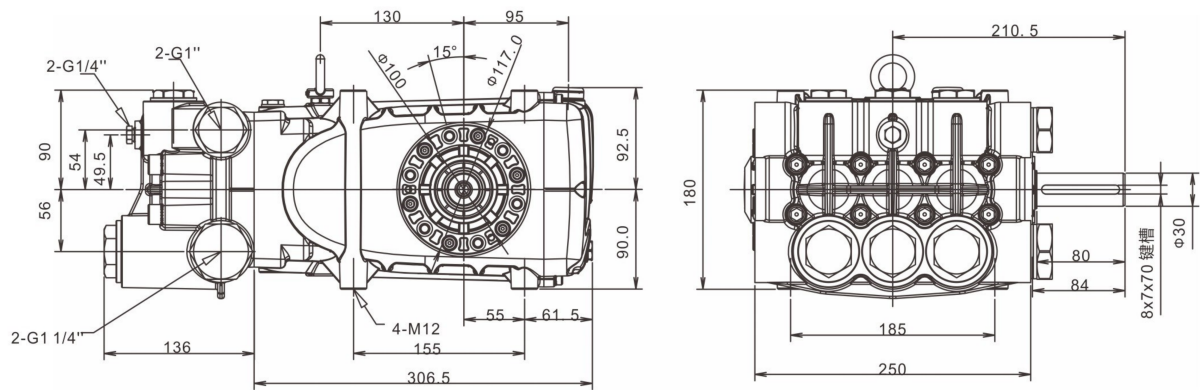

INDUSTRIAL PUMP SERIES


WKXC 系列

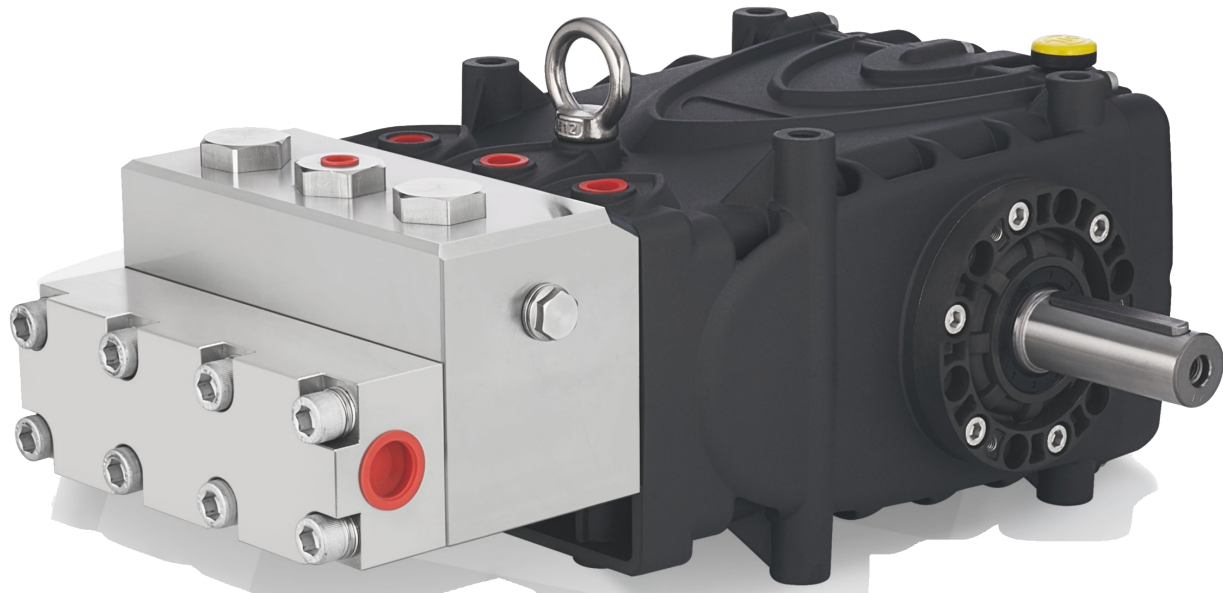

性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
WKXC16	24.0	6.4	800	11600	50.6	38.0	1450	G3/4"	G3/8"	36.0
WKXC18	30.0	8.0	600	8700	48.0	36.0	1450	G3/4"	G3/8"	36.0
WKXC20	37.0	9.7	500	7250	50.0	37.0	1450	G3/4"	G3/8"	36.0
WKXC22	45.0	11.9	400	5800	48.0	36.0	1450	G3/4"	G3/8"	36.0
WKXC25	58.0	15.3	250	3625	38.6	29.0	1450	G1"	G1/2"	36.0

WKXC 外形尺寸图 / OVERALL DIMENSIONS (mm)

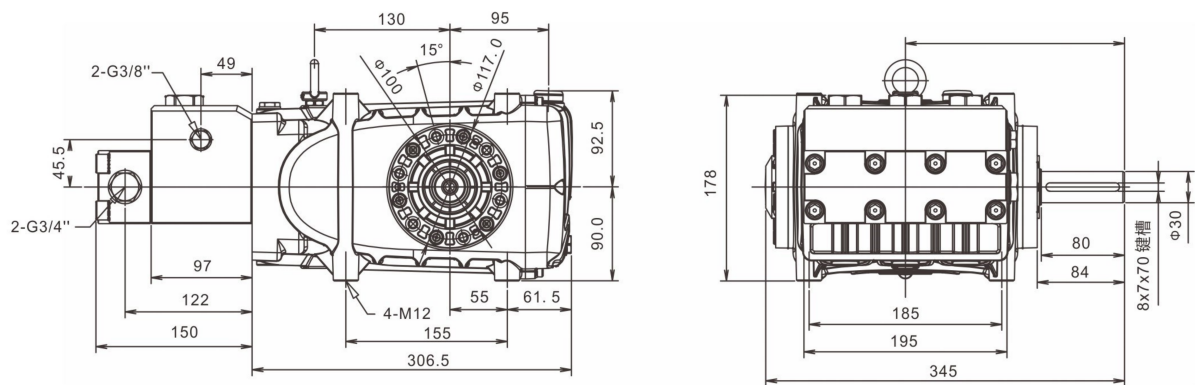

INDUSTRIAL PUMP SERIES


WKXT 系列



性能参数 / PERFORMANCE DATA


型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
WKXT10	9.0	2.4	1500	21750	30.0	22.0	1450	G1/2"	G3/8"	43.0
WKXT12	13.5	3.6	1500	21750	48.0	36.0	1450	G1/2"	G3/8"	43.0
WKXT14	18.5	4.8	1000	14500	48.0	36.0	1450	G1/2"	G3/8"	43.0
WKXT16	24.0	6.3	1000	14500	64.0	48.0	1450	G1/2"	G3/8"	43.0
WKXT18	30.0	8.0	800	14500	64.0	48.0	1450	G1/2"	G3/8"	43.0

WKXT 外形尺寸图 / OVERALL DIMENSIONS (mm)

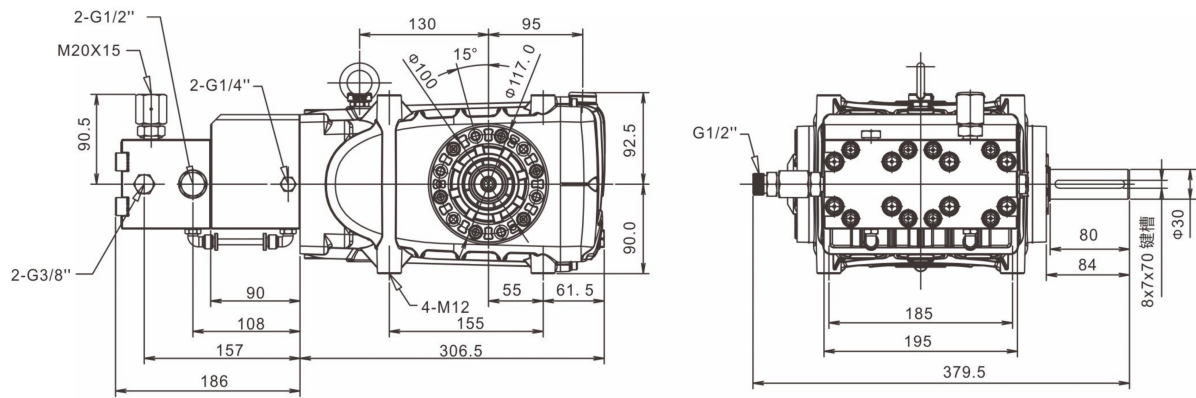

INDUSTRIAL PUMP SERIES


FKH 系列

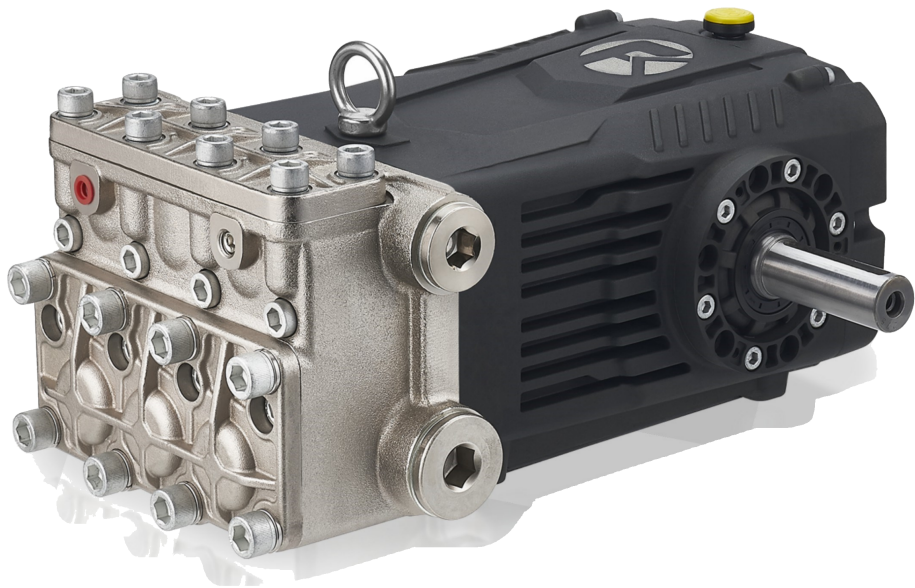

性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm	压力 bar	psi	功率 hp	kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKH30	85.0	22.5	180	2610	40.0	30.0	1450	G1 1/4"	G1"	40.0
FKH32	96.0	25.4	150	2200	40.0	30.0	1450	G1 1/4"	G1"	40.0
FKH36	121.0	32.0	130	1890	40.0	30.0	1450	G1 1/4"	G1"	40.0
FKH40	150.0	39.6	100	1450	40.0	30.0	1450	G1 1/4"	G1"	40.0
FKH45	131.0	34.6	80	1160	28.0	21.0	1000	G1 1/4"	G1"	40.0
FKH45	118.0	31.1	80	1160	25.0	19.0	900	G1 1/4"	G1"	40.0
FKH45	105.0	27.7	80	1160	23.0	17.0	800	G1 1/4"	G1"	40.0

FKH 外形尺寸图 / OVERALL DIMENSIONS (mm)

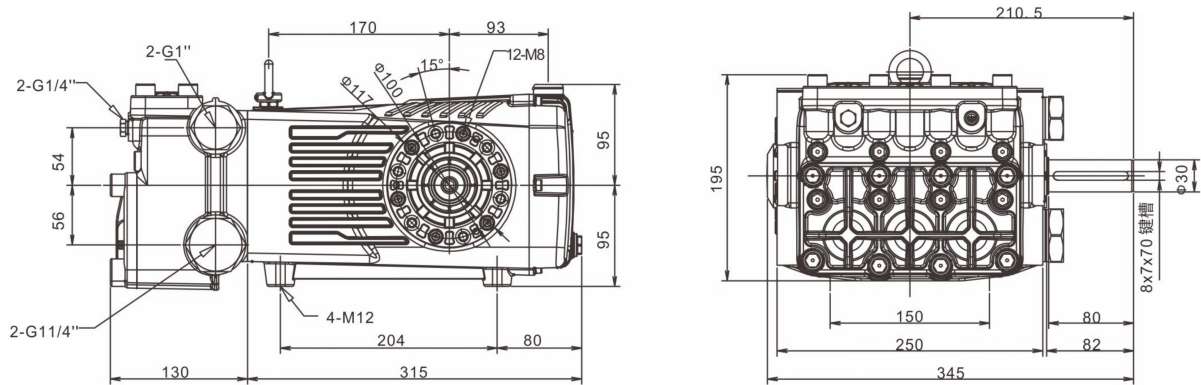

INDUSTRIAL PUMP SERIES


FKHG 系列



性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm	压力 bar	psi	功率 hp	kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKHG32	96.0	25.4	150	2200	40.0	30.0	1450	G1 1/4"	G1"	45.0
FKHG36	121.0	32.0	130	1890	40.0	30.0	1450	G1 1/4"	G1"	45.0
FKHG40	150.0	39.6	100	1450	40.0	30.0	1450	G1 1/4"	G1"	45.0
FKHG40	103.0	27.2	100	1450	28.0	20.6	1000	G1 1/4"	G1"	45.0
FKHG45	131.0	34.6	80	1160	28.0	21.0	1000	G1 1/4"	G1"	40.0

FKHG 外形尺寸图 / OVERALL DIMENSIONS (mm)

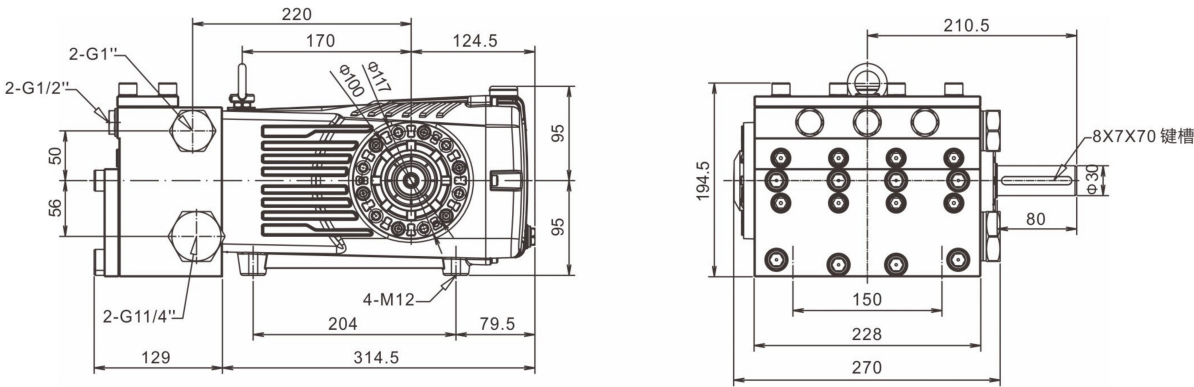



型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKHC16	24.0	6.4	800	11600	50.6	38.0	1450	G3/4"	G3/8"	38.0
FKHC18	30.0	8.0	600	8700	48.0	36.0	1450	G3/4"	G3/8"	38.0
FKHC20	37.0	9.7	500	7250	50.0	37.0	1450	G3/4"	G3/8"	38.0
FKHC22	45.0	11.9	400	5800	48.0	36.0	1450	G3/4"	G3/8"	38.0
FKHC25	58.0	15.3	250	3625	38.6	29.0	1450	G1"	G1/2"	40.0

Technical drawing of the 315W three-phase asynchronous motor, showing front and top views with dimensions in mm.

Front View Dimensions:

- Total width: 315
- Top flange width: 170
- Top flange thickness: 93
- Motor body width: 122
- Motor body height: 95
- Base width: 80
- Base height: 95
- Base mounting hole diameter: $\phi 17$
- Base mounting hole pitch: 15°
- Base mounting hole diameter: $\phi 100$
- Base mounting hole diameter: 12-M8
- Base mounting hole diameter: 4-M12
- Base mounting hole diameter: 2-G3/8"
- Base mounting hole diameter: 2-G3/4"
- Base mounting hole diameter: 49
- Base mounting hole diameter: 45.5
- Base mounting hole diameter: 97
- Base mounting hole diameter: 150
- Base mounting hole diameter: 204
- Base mounting hole diameter: 80
- Base mounting hole diameter: 315

Top View Dimensions:

- Total width: 210.5
- Motor body width: 150
- Motor body height: 183
- Base width: 80
- Base height: 82
- Base mounting hole diameter: $\phi 30$
- Base mounting hole pitch: 8X7X70 键槽
- Base mounting hole diameter: 195
- Base mounting hole diameter: 345

INDUSTRIAL PUMP SERIES


FKHT 系列



性能参数 / PERFORMANCE DATA


型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKHT10	9.0	2.4	1500	21750	30.0	22.0	1450	G1/2"	G3/8"	45.0
FKHT12	13.5	3.6	1500	21750	48.0	36.0	1450	G1/2"	G3/8"	45.0
FKHT14	18.5	4.8	1000	14500	48.0	36.0	1450	G1/2"	G3/8"	45.0
FKHT16	24.0	6.3	1000	14500	64.0	48.0	1450	G1/2"	G3/8"	45.0
FKHT18	30.0	8.0	800	14500	64.0	48.0	1450	G1/2"	G3/8"	45.0

FKHT 外形尺寸图 / OVERALL DIMENSIONS (mm)

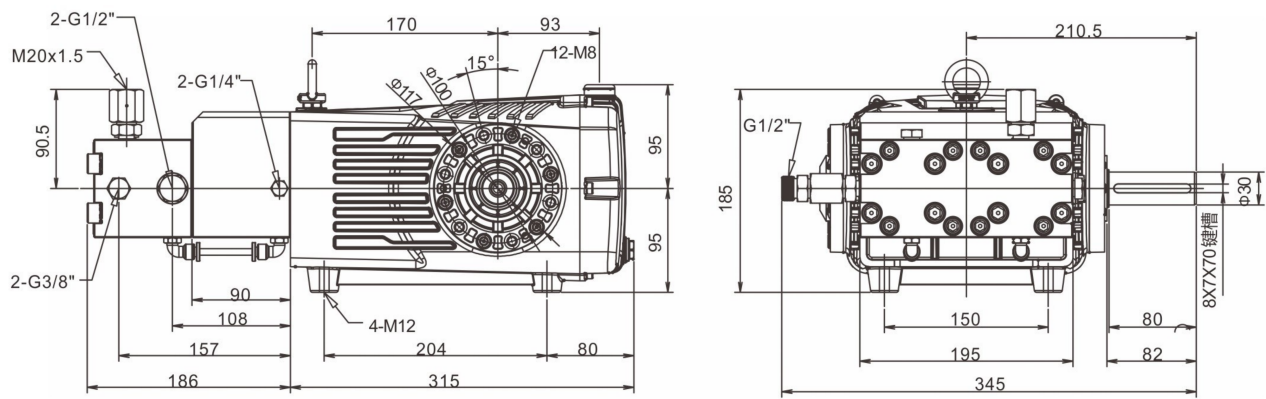

INDUSTRIAL PUMP SERIES


FKL 系列

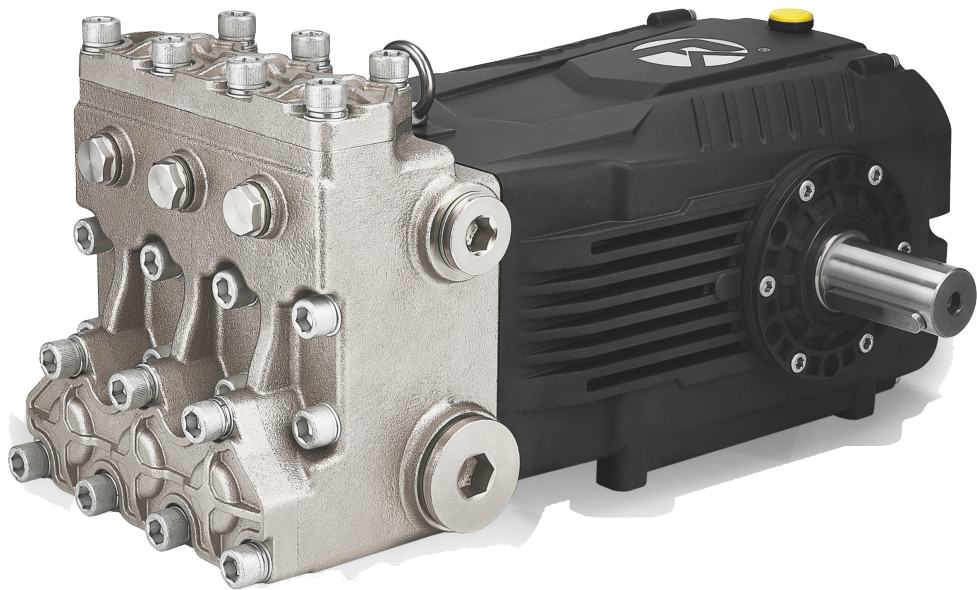

性能参数 / PERFORMANCE DATA


型号 Model	流量 Flow L/min	gpm	压力 bar	psi	功率 hp	kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKL36	137.0	36.2	140	2030	50.0	37.0	900	G1 1/2"	G1"	65.0
FKL36	153.0	40.4	130	1885	52.0	38.0	1000	G1 1/2"	G1"	65.0
FKL40	169.0	44.4	110	1595	49.0	36.0	900	G1 1/2"	G1"	65.0
FKL40	189.0	50.0	110	1595	56.0	41.0	1000	G1 1/2"	G1"	65.0
FKL45	215.0	56.8	80	1160	45.0	33.0	900	G1 1/2"	G1"	65.0
FKL45	239.0	63.0	80	1160	51.0	37.0	1000	G1 1/2"	G1"	65.0

FKL 外形尺寸图 / OVERALL DIMENSIONS (mm)

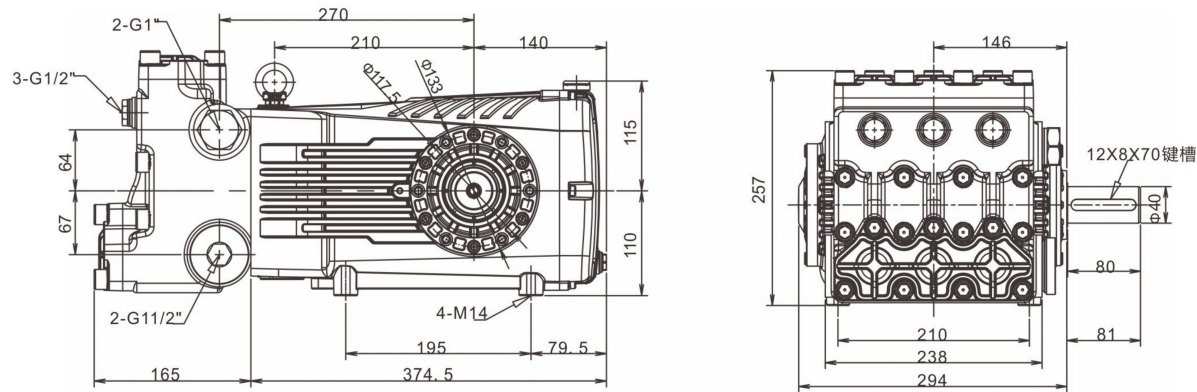

INDUSTRIAL PUMP SERIES


FKLG 系列

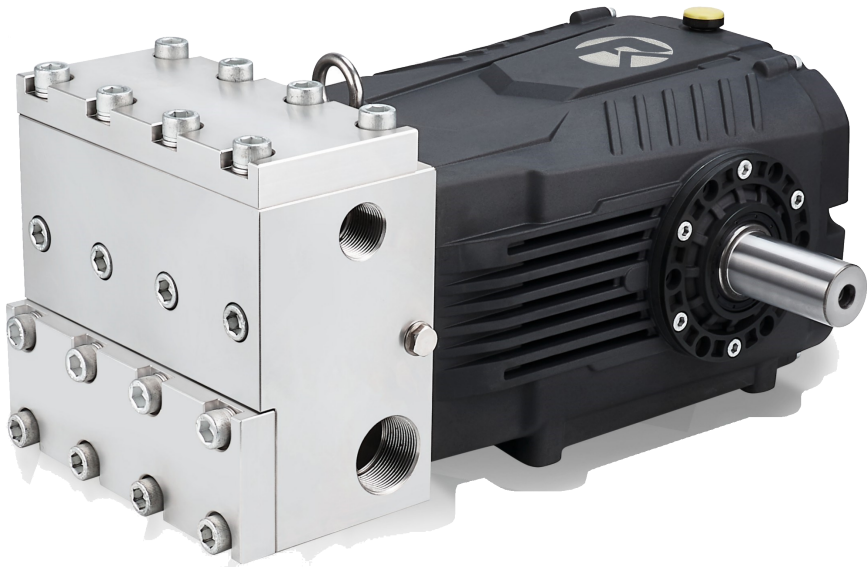

性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKLG36	137.0	36.2	140	2030	50.0	37.0	900	G1 1/2"	G1"	70.0
FKLG36	153.0	40.4	130	1885	52.0	38.0	1000	G1 1/2"	G1"	70.0
FKLG40	169.0	44.4	110	1595	49.0	36.0	900	G1 1/2"	G1"	70.0
FKLG40	189.0	50.0	110	1595	56.0	41.0	1000	G1 1/2"	G1"	70.0
FKLG45	215.0	56.8	80	1160	45.0	33.0	900	G1 1/2"	G1"	70.0
FKLG45	239.0	63.0	80	1160	51.0	37.0	1000	G1 1/2"	G1"	70.0

FKLG 外形尺寸图 / OVERALL DIMENSIONS (mm)

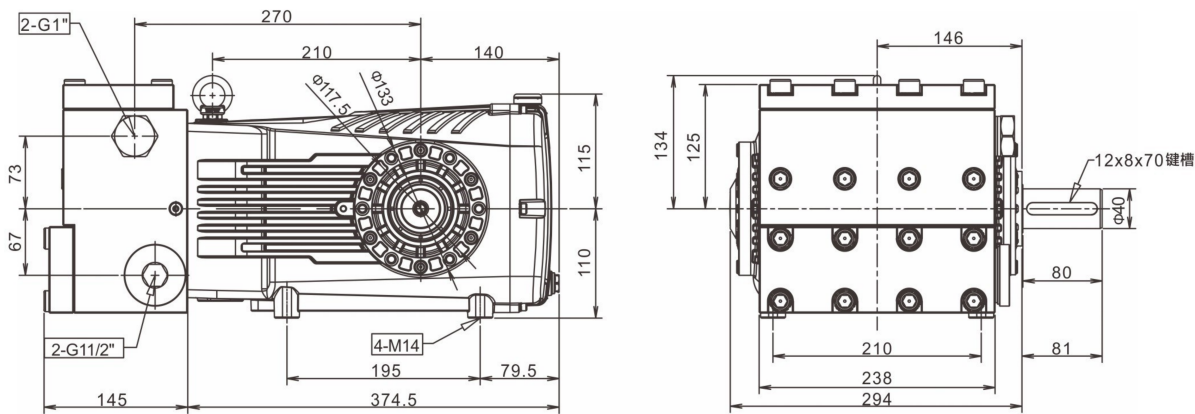


FKLC 系列



性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKLC18	38.0	10.1	500	7250	50.0	37.0	1000	G1"	G1/2"	60.0
FKLC20	47.0	12.4	400	5800	50.0	37.0	1000	G1"	G1/2"	60.0
FKLC22	57.0	15.0	350	5075	50.0	37.0	1000	G1"	G1/2"	60.0
FKLC25	73.0	19.3	280	4060	50.0	37.0	1000	G1"	G1/2"	60.0

FKLC 外形尺寸图 / OVERALL DIMENSIONS (mm)

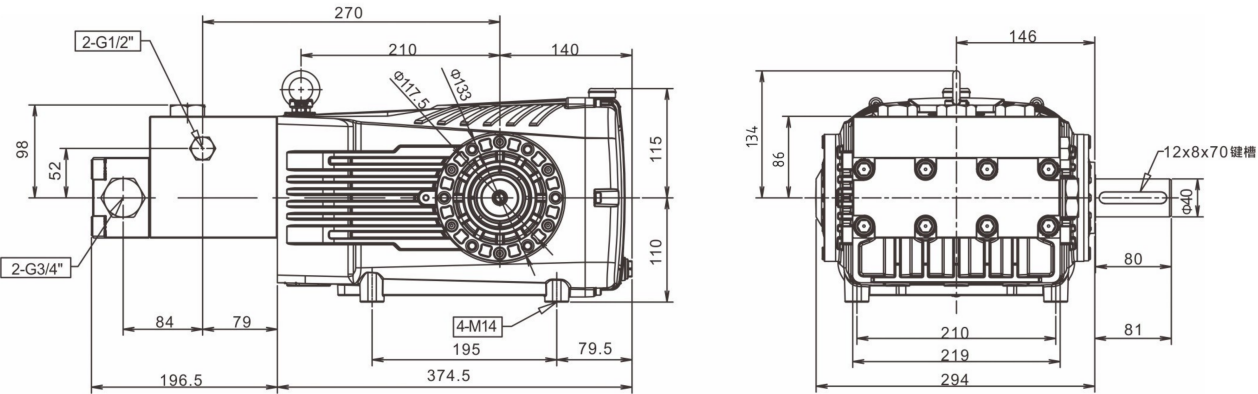

INDUSTRIAL PUMP SERIES


FKLT 系列



性能参数 / PERFORMANCE DATA

型号 Model	流量 Flow L/min	gpm gpm	压力 bar	psi psi	功率 hp	kW kW	转速 rpm	进水口 Inlet	出水口 Outlet	重量 KG
FKLT10	11.0	3.0	2000	29000	50.0	45.0	1000	G1/2"	G3/8"	70.0
FKLT12	17.0	4.5	1500	21750	60.0	45.0	1000	G1/2"	G3/8"	70.0
FKLT14	23.0	6.1	1500	21750	80.0	60.0	1000	G1/2"	G3/8"	70.0
FKLT16	30.0	8.0	1000	14500	80.0	60.0	1000	G1/2"	G3/8"	70.0
FKLT18	38.0	10.1	800	8700	80.0	60.0	1000	G1/2"	G3/8"	70.0
FKLT14	18.0	4.7	1200	17400	60.0	45.0	1450	G1/2"	G3/8"	70.0
FKLT16	24.0	6.3	1000	14500	64.0	48.0	1450	G1/2"	G3/8"	70.0

FKLT 外形尺寸图 / OVERALL DIMENSIONS (mm)

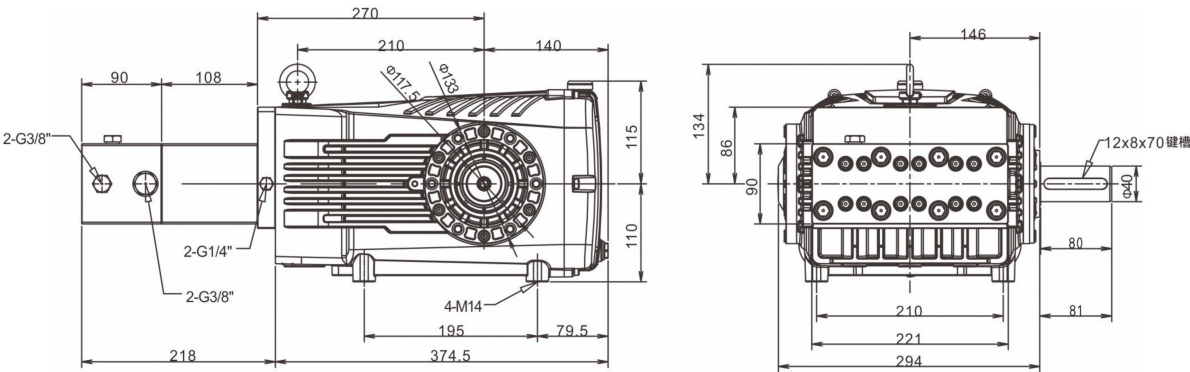



THANK YOU

感谢您的关注

南京承希科技有限公司

www.centsea.com

025-85551635

南京市栖霞区广月路30-06号

PROFESSIONAL HIGH PRESSURE PUMP SOLUTIONS